




Auto

→ Oil additives

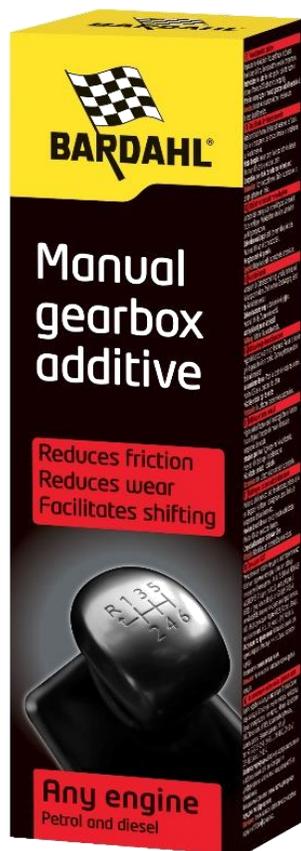

# Manual Gearbox Additive

Ref. 1045B

12x150ml

## USE

Bardahl Manual gearbox additive extends the gearbox lifespan, improves its performance and facilitates gear shifting.

Miscible in any type of manual gearbox and differential oil.

## PHYSICAL & CHEMICAL PROPERTIES

SAE Type	75W90
Density at 15°C kg/cm <sup>3</sup>	0.9
Viscosity at 100°C mm <sup>2</sup> /s	16
Viscosity at 40°C mm <sup>2</sup> /s	120
Viscosity index	> 140
Freezing point °C	-49
Flash point °C	> 235
Test FZG <-> DIN 51384	> 12
Lead content	None
Chlorine content	None
Copper corrosion test D130	1a
API GL	4-5
MIL	L 2105C

## PROPERTIES

The Bardahl Manual Gearbox Additive has the following properties:

- Reduces wear on gear teeth
- Reduces friction
- Lowers the operating temperature
- Reduces oxidation and protecting against corrosion
- Improves the lubrication of bearings
- Reduces noise

## INSTRUCTIONS FOR USE

Add product into the oil crankcase.

Dosage: from 10 to 20% maximum of the oil crankcase capacity, respecting the recommended oil level. Can be mixed with all types of mineral oil, semi-synthetic, fully synthetic and Dexron.

### CAUTION

Do not use in automatic transmissions and limited-slip differentials.

**NOTHING WILL STOP YOU**

SADAPS BARD AHL CORPORATION S.A.

Rue de Lille, 104. 59420 MOUVAUX  
T: (+33) (0)3 10 38 38 38

SADAPS BARD AHL ADDITIVES &amp; LUBRICANTS

Rue de Mont des Carliers, 3. ZI TOURNAI Ouest, 2  
T: (+32) (0) 69 59 03 60[www.bardahl.fr](http://www.bardahl.fr)

V08/2019